

DigiTRAK® SE® Transmitters

SES – Short Range Transmitter



ST 12 – Standard Range Transmitter




Part No.	Model No.	Range	Freq.	Battery Type (awake/asleep)	Operating Temperature	Length x Diameter	Weight
SES	SES	15 ft.	12.0 kHz	1 AA-cell alkaline (12/200 hrs)	-4 to 180° F	8 x 1.00 in.	8.4 oz
ST 12	HDT	50 ft.	12.0 kHz	2 C-cell alkaline (20/200 hrs) or 1 SuperCell™ (40/400 hrs)	-4 to 220° F	15 x 1.25 in.	1.4 lb

These battery-operated transmitters enter sleep mode after 15 minutes of inactivity. Both transmitters have a pitch resolution of 1% or 1°.

Housing Specifications and Requirements

DCI's SE® Series transmitters work best with slots that are equally spaced around the circumference of the drill head for optimal signal emission and maximum battery life. Measure slot lengths on the *inside* of the housing; slots must be at least $\frac{1}{16}$ in. wide.

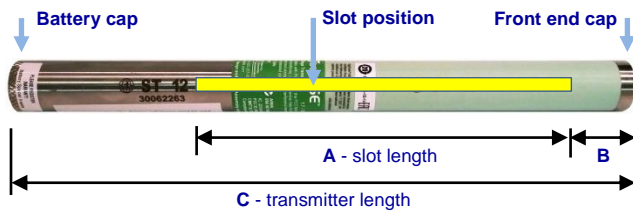

ST 12 transmitter shown above

Part No. ↓	A	B	C
SES	3.75 in.	1.25 in.	8 in.
ST 12	8.5 in.	2 in.	15 in.

DCI: THE BUSINESS OF HDD LOCATING