

DigiTrak®

6-INCH TRANSMITTERS



LEARN MORE



POWERED BY  **DIGITAL CONTROL**

MADE IN U.S.A



Digitrak[®]


SMALL TRANSMITTER. BIG PERFORMANCE.



FT5XS 6-IN WIDEBAND TRANSMITTER FOR F5+
» 9 Bands 1000+ frequencies 4.5 – 45 kHz



FT2XS 6-IN WIDEBAND TRANSMITTER FOR F2+
» 9 Bands 500+ frequencies 4.5 – 45 kHz




FT1XS 6-IN SINGLEBAND TRANSMITTER FOR F1
» 1 Band 60+ frequencies 9.0 – 13.5 kHz

FALCON XS 6-IN SPECIFICATIONS

- » Model Number - BTM
- » Length/Diameter - 15cm/1.8cm (5.9in/0.71in)
- » Depth/Max Mode Data - 6.1m/7.6m (20ft/25ft)
- » Battery Life - AA Alkaline/Li 1.5v Up to 20hrs/36hrs
- » Clock Resolution - 24 with F2+/F5+
- » Standard Pitch - 0.1% when level
- » Expanded Pitch (F2+ only) - 1.0% to max range
- » Max Temp 180f (82c)
- » 90 day Warranty Period
- » Voltage/Current -1.0 -3.0v/400mA Max

FALCON XS 6-IN TRANSMITTER

The new Falcon 6-inch Extra Small Transmitter is designed to address the commercial need for smaller diameter HDD tooling that can be used for short and shallow bores. The new transmitter features the advantages of the Falcon multi-frequency, multi-band approach to addressing active interference on the job site.

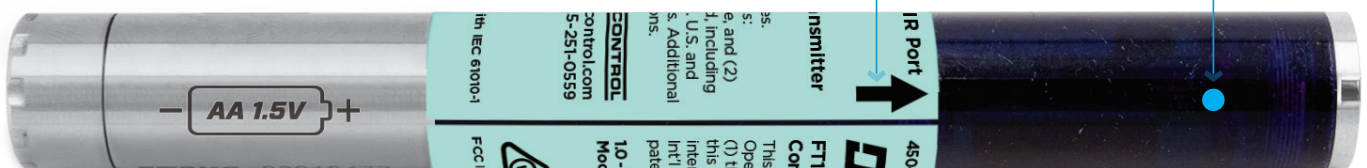

XS IR PORT has a start up LED and is 20mm/.7" below the clocking slot.