

DigiTRAK FS+ TRANSMITTERS











LEARN MORE



MADE IN U.S.A 

POWERED BY  DIGITAL CONTROL

TRANSMITTER FEATURES

 V2 Multi-power Transmitter	 Full Scale 0.1 Pitch
 V2 Increased Depth	 Fluid Pressure
 Rechargeable LiR Adapter	 DigiTrak Falcon Pairing
 V2 Custom Battery Life	 Sub-K® Rebar Capacity

TRANSMITTER SPECIFICATIONS



V2 Wideband VS Sub-K Rebar

Our Wideband transmitters include V2 Multi-Power which gives you three selectable power modes to dial in your ideal balance of power and battery life, while also supporting Fluid Pressure, Full Scale Sensitive Pitch and **over 1000 frequencies** to help you avoid active and passive interference.

Our Industry exclusive Sub-K Rebar transmitters utilize ultra low range frequencies geared towards helping you navigate under reinforced concrete, while also supporting Fluid Pressure and Full Scale Sensitive Pitch. These transmitters support dual modes that can be changed below ground; Sub-k mode with low power range and Standard Power mode with **over 300 frequencies** when depth and interference become an issue.

Now when using with the DigiTrak Falcon F5+ you can get higher data speeds on V2 low power for the fastest updates ever!

Product #	V2 Wideband w/PSI			Sub-k Rebar w/PSI		
	FT5p	FT5Lp	FT5XLp	FTR5s	FTR5p	FTR5Lp
V2 Multi-Power	✓	✓	✓			
V2 Increased Depth	✓	✓	✓			
LiR Rechargeable	✓	✓	✓		✓	✓
Sub-K Capacity				✓	✓	✓
V2 Custom Battery Life	✓	✓	✓			
Fluid Pressure	✓	✓	✓		✓	✓
FSSP 0.1% Pitch	✓	✓	✓		✓	✓
Falcon Pairing	✓	✓	✓	✓	✓	✓



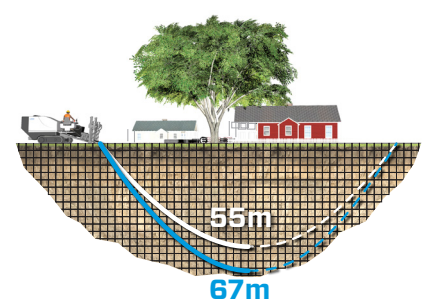
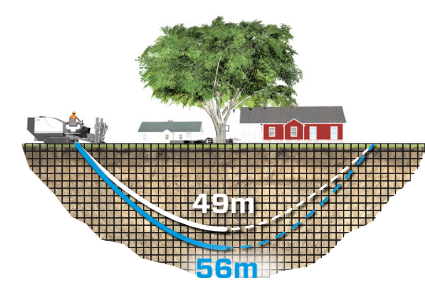
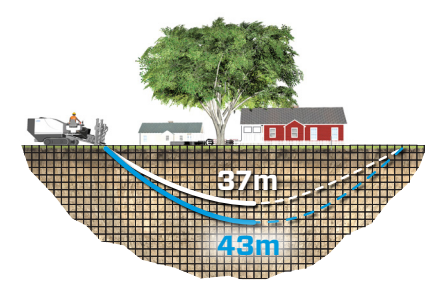
Rechargeable Lithium-Ion batteries compatible with adapter.

Warranty Registration

All 15, 19, and 24 inch Transmitters backed by our standard 3 year/500 hour warranty with an available extended 5 year/750 hour warranty. Our 6 and 8 inch Transmitters are backed by a 90 day warranty.

ONE TRANSMITTER, THREE MODES

GET THE JOB DONE WITH WIDEBAND V2 MULTI-POWER TRANSMITTERS AND SUPERCCELL™

<h3>Drilling Deep?</h3> <p>Use High Power Mode.</p> <table border="0"> <tr> <td>15"</td> <td>14 Hours</td> <td>38m Depth range</td> <td>49m* Data range</td> </tr> <tr> <td>19"</td> <td>14 Hours</td> <td>49m Depth range</td> <td>61m* Data range</td> </tr> <tr> <td>24"</td> <td>14 Hours</td> <td>55m Depth range</td> <td>67m* Data range</td> </tr> </table> 	15"	14 Hours	38m Depth range	49m* Data range	19"	14 Hours	49m Depth range	61m* Data range	24"	14 Hours	55m Depth range	67m* Data range	<h3>Drilling?</h3> <p>Use Standard Mode.</p> <table border="0"> <tr> <td>15"</td> <td>80 Hours</td> <td>30m Depth range</td> <td>38m Data range</td> </tr> <tr> <td>19"</td> <td>40 Hours</td> <td>38m Depth range</td> <td>46m Data range</td> </tr> <tr> <td>24"</td> <td>40 Hours</td> <td>49m Depth range</td> <td>56m Data range</td> </tr> </table> 	15"	80 Hours	30m Depth range	38m Data range	19"	40 Hours	38m Depth range	46m Data range	24"	40 Hours	49m Depth range	56m Data range	<h3>Drilling Shallow?</h3> <p>Use Low Power Mode.</p> <table border="0"> <tr> <td>15"</td> <td>140 Hours</td> <td>20m Depth range</td> <td>24** Data range</td> </tr> <tr> <td>19"</td> <td>120 Hours</td> <td>30m Depth range</td> <td>37m** Data range</td> </tr> <tr> <td>24"</td> <td>120 Hours</td> <td>37m Depth range</td> <td>43m** Data range</td> </tr> </table> 	15"	140 Hours	20m Depth range	24** Data range	19"	120 Hours	30m Depth range	37m** Data range	24"	120 Hours	37m Depth range	43m** Data range
15"	14 Hours	38m Depth range	49m* Data range																																			
19"	14 Hours	49m Depth range	61m* Data range																																			
24"	14 Hours	55m Depth range	67m* Data range																																			
15"	80 Hours	30m Depth range	38m Data range																																			
19"	40 Hours	38m Depth range	46m Data range																																			
24"	40 Hours	49m Depth range	56m Data range																																			
15"	140 Hours	20m Depth range	24** Data range																																			
19"	120 Hours	30m Depth range	37m** Data range																																			
24"	120 Hours	37m Depth range	43m** Data range																																			

*Actual ranges and battery life will vary based on interference, transmitter housing, frequency and other factors.