

# DigiTRAK™ F2+ TRANSMITTERS



LEARN MORE



MADE IN U.S.A 

POWERED BY  DIGITAL CONTROL

# TRANSMITTER FEATURES

- V2 Multi-power Transmitter
- 0.1% Precision Pitch
- V2 Increased Depth
- DigiTrak Falcon Pairing
- Rechargeable LiR Adapter
- V2 Custom Battery Life

# TRANSMITTER SPECIFICATIONS



\*FT2L+ 19" ONLY Compatible with DigiTrak Falcon F2+

## FT2 Wideband Transmitters

Our 8", 15" and 19" F2/F2+ Wideband transmitters include V2 Multi-Power which gives you three selectable power modes to dial in your ideal balance of power and battery life, and 500+ frequencies to help you avoid active and passive interference. Now with the FT2L+ transmitter you can access an available depth range of 160 ft and data range of 200ft.

When using the DigiTrak Falcon F2+ you can get higher data speeds on low power for our fastest updates ever.

## Warranty Registration

All 15" and 19" Transmitters backed by our standard 3 year/500 hour warranty with an available extended 5 year/750 hour warranty. Our 6 and 8 inch Transmitters are backed by a 90 day warranty.

| 500+ Frequencies        | F2+ Wideband |            |       |       |
|-------------------------|--------------|------------|-------|-------|
|                         | Product #    | FT2s/FT2xs | FT2** | FT2L+ |
| V2 Multi-Power          |              | ✓          | ✓     | ✓     |
| V2 Increased Depth      |              | ✓          | ✓     | ✓     |
| LiR Rechargeable        |              |            | ✓     | ✓     |
| Sub-K Capacity          |              |            |       |       |
| V2 Custom Battery Life  |              | ✓          | ✓     | ✓     |
| Fluid Pressure          |              |            |       |       |
| 24 Clock (F2+ Only)     |              | ✓          | ✓     | ✓     |
| 0.1% Pitch (when level) |              | ✓          | ✓     | ✓     |
| Falcon Pairing          |              | ✓          | ✓     | ✓     |

\*\*The new 2024 Blue FT2s has V2 capability, the previous models in the green tube FT2s do not.



Rechargeable Lithium-Ion batteries compatible with adapter.


# ONE TRANSMITTER, THREE MODES

GET THE JOB DONE WITH WIDEBAND V2 MULTI-POWER TRANSMITTERS AND SUPERCCELL™

### Drilling Deep?

Use **High Power Mode.**


- 15" 14 Hours 38m Depth range 49m\* Data range
- 19" 14 Hours 49m Depth range 61m Data range

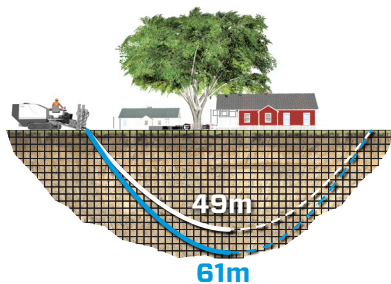

### Drilling?

Use **Standard Mode.**


- 15" 80 Hours 30m Depth range 38m Data range
- 19" 40 Hours 38m Depth range 46m Data range

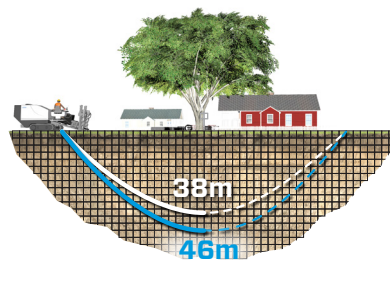

### Drilling Shallow?

Use **Low Power Mode.**

- 15" 140 Hours 20m Depth range 24m\*\* Data range
- 19" 120 Hours 30m Depth range 38m\*\* Data range

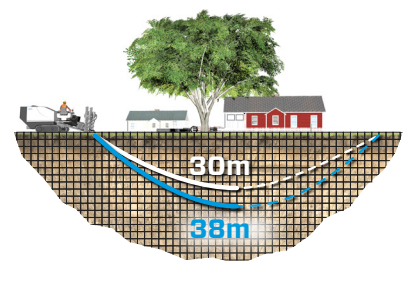

\*Actual ranges and battery life will vary based on interference, transmitter housing, frequency and other factors.