

# **DigiTRAK<sup>®</sup>**

## **6-INCH TRANSMITTERS**



LEARN MORE



POWERED BY  **DIGITAL CONTROL**

MADE IN U.S.A 

# DigiTRAK<sup>®</sup>


SMALL TRANSMITTER. BIG PERFORMANCE.



**FT5XS 6-IN WIDEBAND TRANSMITTER FOR F5+**  
 » 9 Bands 1000+ frequencies 4.5 - 45 kHz



**FT2XS 6-IN WIDEBAND TRANSMITTER FOR F2+**  
 » 9 Bands 500+ frequencies 4.5 - 45 kHz



**FT1XS 6-IN SINGLEBAND TRANSMITTER FOR F1**  
 » 1 Band 60+ frequencies 9.0 - 13.5 kHz


## FALCON XS 6-IN TRANSMITTER

The new Falcon 6-inch Extra Small Transmitter is designed to address the commercial need for smaller diameter HDD tooling that can be used for short and shallow bores. The new transmitter features the advantages of the Falcon multi-frequency, multi-band approach to addressing active interference on the job site.



## FALCON XS 6-IN SPECIFICATIONS

- » Model Number - BTM
- » Length/Diameter - 15cm/1.8cm (5.9in/0.71in)
- » Depth/Max Mode Data - 6.1m/7.6m (20ft/25ft)
- » Battery Life - AA Alkaline/Li 1.5v Up to 20hrs/36hrs
- » Clock Resolution - 24 with F2+/F5+
- » Pitch Resolution - 0.1% when level
- » Max Temp 180f (82c)
- » 90 day Warranty Period
- » Voltage/Current -1.0 -3.0v/400mA Max

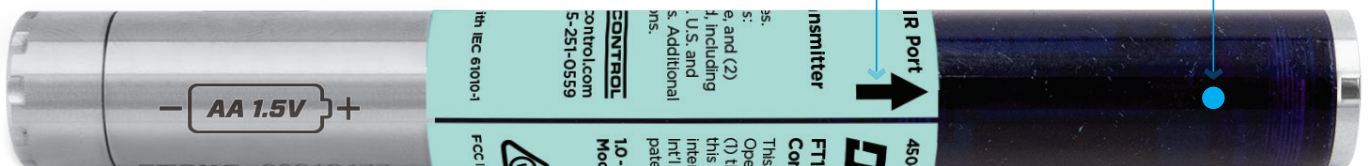

**XS IR PORT** has a start up LED and is 20mm/.7" below the clocking slot.

\*XS is not compatible with Falcon F5 unless it has Sub-k Rebar updates.  
 ©2024 Digital Control Incorporated, All rights reserved.

**MADE IN U.S.A.**

402-2075-99-B